

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 October 2005 (20.10.2005)

PCT

(10) International Publication Number
WO 2005/098225 A1

(51) International Patent Classification⁷: **F02G 5/02**,
F01N 5/02

(74) Agents: **FUKAMI, Hisao** et al.; Fukami Patent Of-
fice, Nakanoshima Central Tower, 22nd Floor, 2-7,
Nakanoshima 2-chome, Kita-ku, Osaka-shi, Osaka
530-0005 (JP).

(21) International Application Number:
PCT/JP2005/004383

(22) International Filing Date: 7 March 2005 (07.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-113361 7 April 2004 (07.04.2004) JP

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(71) Applicant (*for all designated States except US*): **TOY-
OTA JIDOSHA KABUSHIKI KAISHA** [JP/JP]; 1, Toy-
ota-cho, Toyota-shi, Aichi 4718571 (JP).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **TAGUCHI, Tomonari**
[JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-
cho, Toyota-shi, Aichi 4718571 (JP).

[Continued on next page]

(54) Title: EXHAUST HEAT RECOVERY POWER GENERATION DEVICE AND AUTOMOBILE EQUIPPED THEREWITH

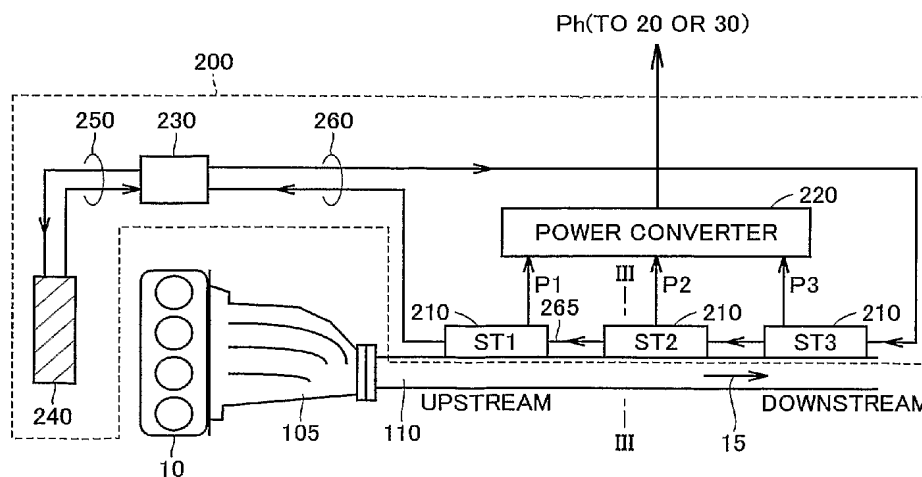

(57) Abstract: An engine (10) exhausts gas (15) which is in turn exhausted through an exhaust pipe (110) in a prescribed direction. A cooling water pump (230) supplies cooling water to circulate a refrigerant through each of cooling water circulation paths (250, 260). The cooling water circulation path (260) includes a cooling water pipe (265) arranged along the exhaust pipe (110) to pass the cooling water. At stacks (ST1-ST3) a plurality of thermoelectric power generation elements are attached to the exhaust pipe (110) and the cooling water pipe (265) successively in a direction from the upstream toward downstream of the exhaust gas (15). The cooling water pipe (265) and the exhaust pipe (110) pass the cooling water and the exhaust gas (15), respectively, in opposite directions so that the downstream stack (ST3) has an increased difference in temperature between the exhaust pipe (110) and the cooling water pipe (265), and the stacks provide power outputs having a reduced difference, and hence an increased total power output. Thus an exhaust heat recovery power generation device can provide increased thermoelectric conversion efficiency without complicated piping.

WO 2005/098225 A1

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.